

单面布基胶带 • SINGLE SIDED CLOTH DUCT TAPE



以PE淋膜的纱布为基材, 纱布另一面涂上热熔型压敏胶粘剂或者橡胶而制成的卷筒状胶粘带。

Polyethylene (PE) Coated fabric cloth, coating with hot melt or natural rubber on one sided.

产品特点 Feature

初粘高, 对地面粘得牢, 对地板不掉胶;
冬夏通用, 粘性受温度影响小;
行业率先提出: 20个月保质期。

Strong adhesive, stick on the ground firmly, no residue and easy peel off by hand;
Four Seasons Genera, the adhesion almost has no influence by temperature, waterproof;
We has taken the leading in 20 months warranty time in this industry.

主要的应用场所 Main Application

会展, 婚庆, 广告行业的地毯封边和临时固定; 建筑装饰行业地膜封边。

The exhibition, wedding, the advertising industry used for carpet edge banding and temporary fixed
Architectural decoration industry used for plastic mulch edge banding.




参数表 Technical Data

品名 Item Name	胶水 Adhesive Type	基材 Backing	厚度 Thickness (um)	涂胶宽度 Glue (mm)	初粘性 Initial Adhesive (cm)	剥离力 Peeling Force (kg/inc)	抗拉强度 Tensile Strength (N/in)	耐温 Temperature Resistance
布基胶带 Duct tape	热熔胶 Hot melt	易撕布 PE coated fabric cloth	260±10	≥1020	≥20	≥20	≥65	-20°C - +45 °C
印刷布基胶带 Printed duct tape	热熔胶 Hot melt	易撕布 PE coated fabric cloth	260±10	≥1020	≥20	≥20	≥65	-20°C - +45 °C
布基胶带 Duct tape	橡胶 Rubber	易撕布 PE coated fabric cloth	300±10	≥1020	≥18	≥24	≥80	-20°C - +80 °C
标准 Standard					GB-4852-1984	GB-4851-1998	GB/T 7753	

热熔胶布基胶带 HOT MELT DUCT TAPE SERIES



橡胶布基胶带 RUBBER DUCT TAPE SERIES

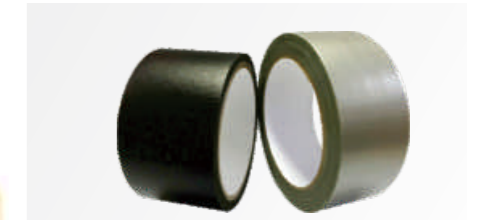

印刷布基胶带 PRINTED DUCT TAPE SERIES

